

UPort™ 1250/1250I

2-port RS-232/422/485 USB-to-serial converter with optional 2 KV isolation protection



UPort™ 1250

UPort™ 1250I

- > Hi-Speed USB 2.0 for up to 480 Mbps USB transmission
- > 921.6 Kbps maximum baudrate for super fast data transmission
- > 128-byte FIFO and on-chip H/W, S/W flow control
- > Additional I/O and IRQ not needed
- > Certified drivers provided for Windows (including Vista), WinCE 5.0, and Linux
- > Easy monitoring with LEDs and management software
- > 15 KV ESD protection for all serial ports
- > Locking power cord for the UPort 1250I

The certification logos shown here apply to some or all of the products in this section. Please see the **Specifications** section or Moxa's website for details.



Instant Plug & Play

The UPort™ 1250/1250I USB-to-serial converters allow you to connect 2 RS-232/422/485 devices to your laptop or workstation through the

USB (Universal Serial Bus) port. This plug & play USB solution is perfect for mobile, instrumentation, and point-of sale applications.

Simplified, Hassle-free Serial Port Expansion

USB plug & play makes serial port expansion easy, and does not require IRQ, DMA, or I/O address resources. Users no longer need

to open the chassis or power down the system to add COM ports, saving on setup time and cost.

Top Serial Performance

Moxa's 20-plus years of experience in serial board design is now built into a new top performance CPU called MOXA ART. This chip equips the UPort™ 1250/1250I converters with USB 2.0 (Hi-Speed 480

Mbps), a 128-byte FIFO, on-chip hardware and software flow control, and burst data mode, making Moxa's UPort™ converters the top performing USB-to-serial converters in the world.

Specifications

USB

- Compliance:** USB 1.1/2.0 compliant
- Connector:** USB type B
- Speed:** 480 Mbps (Hi-Speed USB) and 12 Mbps (Full-Speed USB)

Serial Interface

- Number of Ports:** 2
- Serial Standards:** RS-232/422/485
- Connectors:** DB9 male

Serial Line Protection

- ESD Protection:** 15 KV embedded
- Optical Isolation Protection:** 2 KV (UPort™ 1250I only)

Performance

- Baudrate:** 50 bps to 921.6 Kbps

Serial Communication Parameters

- Data Bits:** 5, 6, 7, 8
 - Stop Bits:** 1, 1.5, 2
 - Parity:** None, Even, Odd, Space, Mark
 - Flow Control:** RTS/CTS, XON/XOFF
 - I/O Address:** Assigned by BIOS
 - IRQ:** Assigned by BIOS
 - FIFO:** 128 bytes
- ### Serial Signals
- RS-232:** TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
 - RS-422:** TxD+(B), TxD-(A), RxD+(B), RxD-(A), GND
 - RS-485-4w:** TxD+(B), TxD-(A), RxD+(B), RxD-(A), GND
 - RS-485-2w:** Data+(B), Data-(A), GND
 - RS-485 Data Direction:** ADDC™ (Automatic Data Direction Control)

Driver Support

Operating Systems: Windows (2000, XP x86/x64, 2003 x86/x64, Vista x86/x64), Win CE 5.0, and Linux 2.6 x86/x64

Physical Characteristics

Housing: SECC sheet metal (1 mm), IP30 protection

Weight:

Product only: 180 g (0.40 lb)

Packaged: 660 g (1.45 lb)

Dimensions: 77 x 26 x 111 mm (3.03 x 1.02 x 4.37 in)

Environmental Limits

Operating Temperature: 0 to 55°C (32 to 131°F)

Operating Humidity: 5 to 95% RH

Storage Temperature: -20 to 75°C (-4 to 167°F)

Regulatory Approvals: EN55022 Class A, EN55024, EN61000-3-2, EN61000-3-3, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, FCC Part 15 Class A, UL, CUL, TÜV

Power Requirements

Power Consumption:

UPort™ 1250 (bus power): 360 mA @ 5 VDC


UPort™ 1250I (12 to 48 VDC external power): 200 mA @ 12 VDC

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions

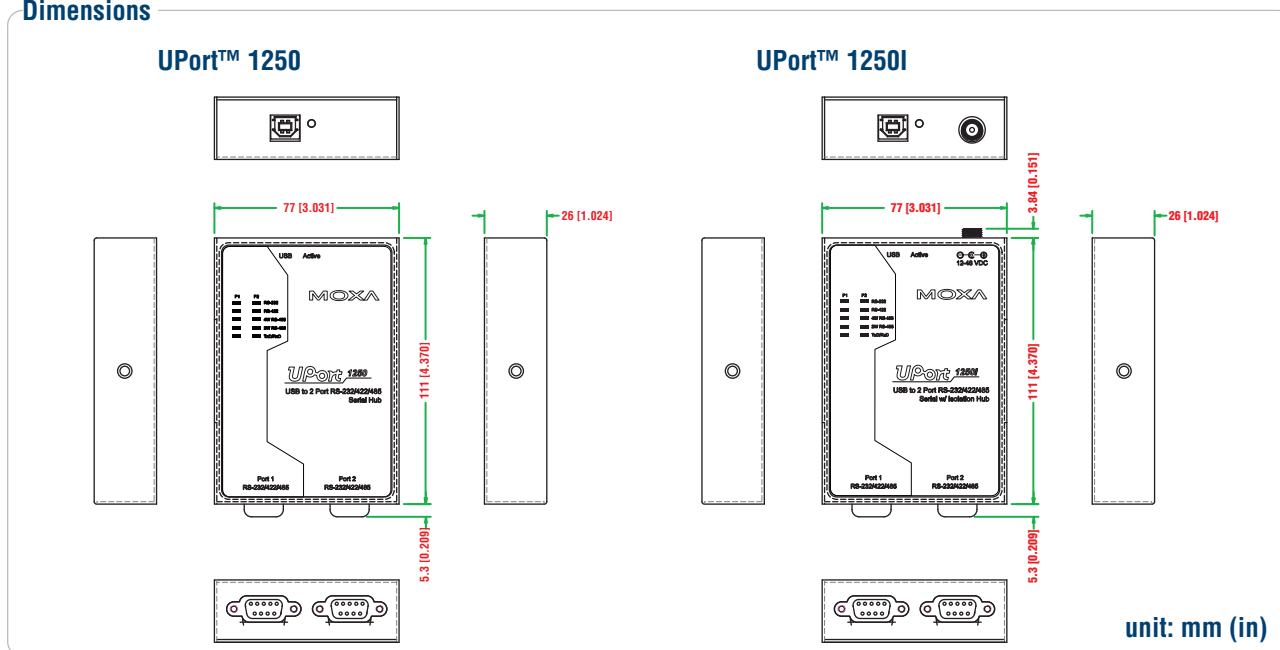

Ordering Information

Available Models

UPort™ 1250: 2-port RS-232/422/485 USB-to-serial converter

UPort™ 1250I: 2-port RS-232/422/485 USB-to-serial converter with 2 KV isolation protection

Optional Accessories (can be purchased separately)

Mini DB9F-to-TB adaptor: DB9 female to terminal block adaptor for RS-422/485 applications

Magnet Accessory: Magnets for attaching the UPort™ 1200 to the PC's housing

Package Checklist

- UPort™ 1250 or 1250I USB-to-serial converter
- 1 mini DB9 female to terminal block adaptor
- Power adaptor (UPort™ 1250I)
- Document and Software CD
- Quick Installation Guide (printed)
- Warranty Card